



- 1-channel
- Device installation permissible in zone 2
- Input EEx ia IIC; $U_0 = 25.4\text{ V}$
- Galvanically isolated output
- 24 V DC supply voltage
- SMART capable up to 7.5 kHz (-3 dB)
- EMC acc. to NAMUR NE 21
- Up to SIL2 acc. to IEC 61508

Input 0/4 mA ... 20 mA
 Output 0/4 mA ... 20 mA
KFD2-STC4-Ex1

Function

SMART transmitter power supplies provide a 2- or 3-wire SMART transmitter and transfer the analogue values.

Digital signals may be superimposed on the analogue values, which will be transferred bidirectionally. Handheld terminals should be connected as shown in the block diagram.


An internal resistor at terminal 9 (at terminals 9 and 12 with version 2O) is available, which may be used to increase the AC impedance for the HART signal.

SMART transmitter power supplies are delivered with terminal type KF-STP-**. Jacks are integrated in these terminals for the connection of the handheld units.

Application

- Power supply for SMART transmitters and transfer of the measurement signal to the output
- for the transfer of a current source to the safe area
- suitable for the following SMART systems:
 ABB, Endress+Hauser, Emerson, Fuji, Smar, VEGA, Yokogawa


Connection

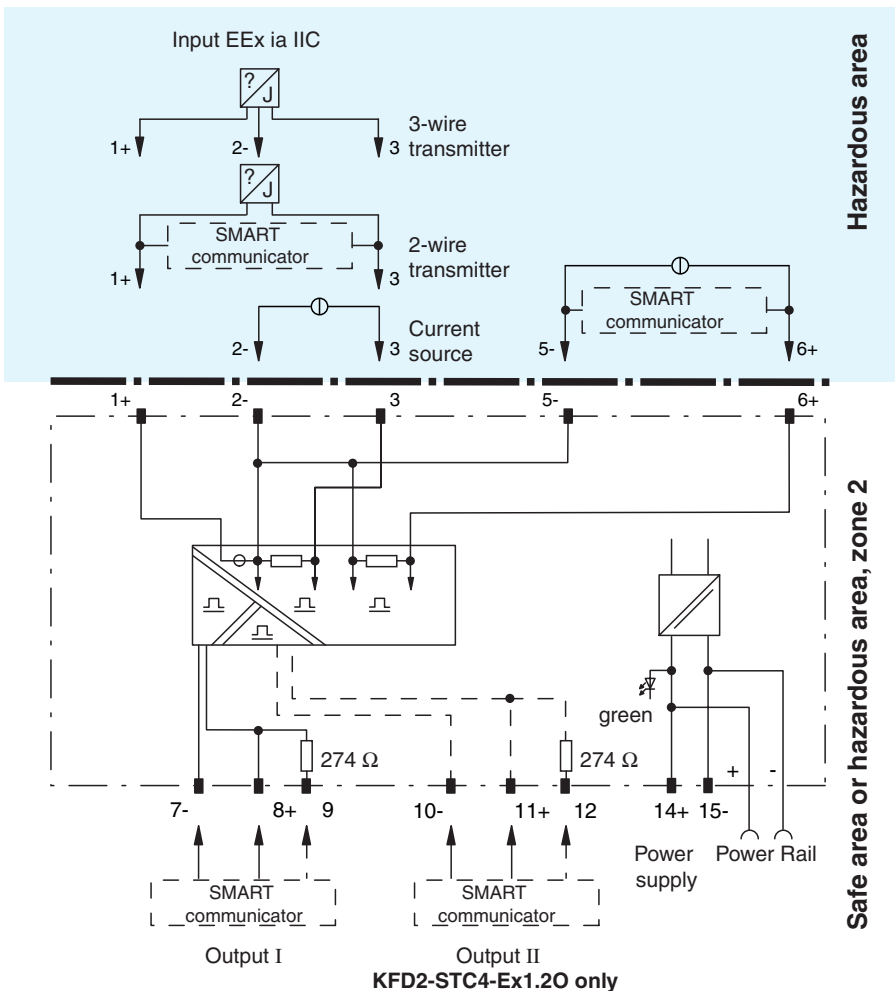

Composition

Front View

Housing type C
 (see system description)

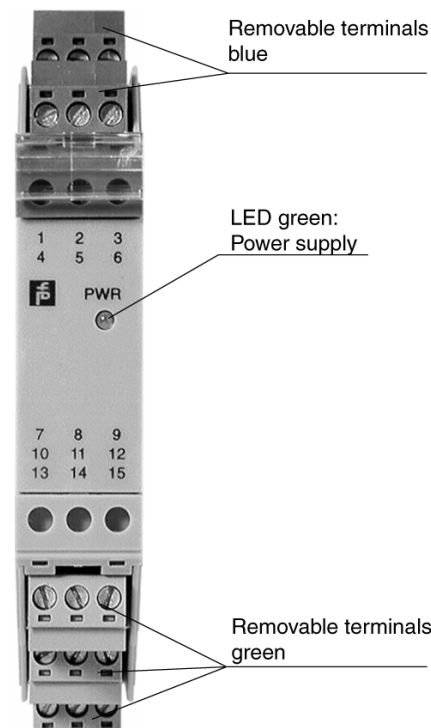

Release date 2005-12-05 15:01 Date of issue 2005-12-05 12:2580_ENG.xml

Supply	
Connection	Power Rail or terminals 14+, 15-
Rated voltage	20 ... 35 V DC
Ripple	within the supply tolerance
Power consumption	1.9 W
Input	
Connection	terminals 1+, 2-, 3 or 5-, 6+
Input signal	0/4 ... 20 mA
Input resistance	≤ 64 Ω terminals 2-, 3 ; ≤ 500 Ω terminals 1+, 3 (250 Ω load)
Available voltage	≥ 16 V at 20 mA terminals 1+, 3
Output	
Connection	terminals 7-, 8+, 9
Load	0 ... 800 Ω
Output signal	0/4 ... 20 mA (overload > 25mA)
Ripple	≤ 50 μA _{rms}
Transfer characteristics	
Deviation	at 20 °C (293 K), 4 ... 20 mA ≤ 10 μA incl. calibration, linearity, hysteresis, loads and fluctuations of supply voltage
Influence of ambient temperature	0.25 μA/°C
Frequency range	hazardous area into the safe area: bandwidth with 0.5 V _{SS} -signal 0 ... 7.5 kHz (-3 dB) safe area into the hazardous area: bandwidth with 0.5 V _{SS} -signal 0.3 ... 7.5 kHz (-3 dB)
Rise time	20 μs
Electrical isolation	
Output/power supply	basic insulation acc. to EN 50178, rated insulation voltage of 50 V AC
Directive conformity	
Electromagnetic compatibility	
Directive 89/336/EC	EN 61326, EN 50081-2
Conformity	
Electromagnetic compatibility	NE 21
Protection degree	IEC 60529
Ambient conditions	
Ambient temperature	-20 ... 60 °C (253 ... 333 K)
Mechanical specifications	
Protection degree	IP20
Mass	approx. 200 g
Dimensions	20 x 118 x 115 mm (0.8 x 4.6 x 4.5 in)
Data for application in conjunction with hazardous areas	
EC-Type Examination Certificate	BAS 99 ATEX 7060 , for additional certificates see www.pepperl-fuchs.com
Group, category, type of protection	⊕ II (1) G D [EEx ia] IIC (-20 °C ≤ T _{amb} ≤ 60 °C) [circuit(s) in zone 0/1/2]
Input	EEx ia IIC
Supply	
Safety maximum voltage U _m	250 V (Attention! The rated voltage can be lower.)
Equipment	terminals 1+, 3-
Voltage U _i	30 V
Current I _i	115 mA
Voltage U _o	25.4 V
Current I _o	86.8 mA
Power P _o	551 mW
Internal capacitance C _i	12 nF
Internal inductance L _i	0 mH
Permissible connection values [EEx ia]	
Internal capacitance C _i /Inductance L _i	12 nF / 0 H
Explosion group	IIA IIB IIC
External capacitance	2.808 μF 0.798 μF 0.093 μF
External inductance	36 mH 18 mH 4.6 mH
Equipment	terminals 2-, 3
Current I _o /Current I _i	74 mA / 115 mA
Current I _i	115 mA
Voltage U _o	3.5 V
Current I _o	74 mA
Power P _o	64 mW
Permissible connection values [EEx ia]	
Explosion group	IIA IIB IIC
External capacitance	> 100 μF > 100 μF > 100 μF

Release date 2005-12-05 15:01 Date of issue 2005-12-05 122580_ENG.xml

External inductance	50 mH	25 mH	6.4 mH
Equipment	terminals 1+, 2 / 3-		
Voltage	U_o	25.4 V	
Current	I_o	115 mA	
Power	P_o	584 mW	
Permissible connection values [EEEx ia]			
Explosion group	IIA	IIB	IIC
External capacitance	2.808 μ F	0.798 μ F	0.093 μ F
External inductance	22 mH	11 mH	2.7 mH
Equipment	terminals 5-, 6+		
Voltage	U_i	30 V	
Current	I_i	115 mA	
Voltage	U_o	8.7 V	
Current	I_o	0 mA	
Output			
Safety maximum voltage U_m	250 V (Attention! The rated voltage can be lower.)		
Statement of conformity	TÜV 99 ATEX 1499 X , observe statement of conformity		
Group, category, type of protection, temperature classification	Ⓔ II 3 G EEx nA II T4 [device in zone 2]		
Electrical isolation			
Input/output	safe electrical isolation acc. to EN 50020, voltage peak value 375 V		
Input/power supply	safe electrical isolation acc. to EN 50020, voltage peak value 375 V		
Directive conformity			
Directive 94/9 EC	EN 50014, EN 50020, EN 50021		

Supplementary information

EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity and instructions have to be observed. For information see www.pepperl-fuchs.com.

Accessories

- Power Rail PR-03
- Power Rail UPR-03
- Power feed module KFD2-EB2...

Using Power Rail PR-03 or UPR-03 the devices are supplied with 24 V DC by means of the power feed modules. If no Power Rails are used, power supply of the individual devices is possible directly via their device terminals.

Each power feed module is used for fusing and monitoring groups with up to 100 individual devices. The Power Rail PR-03 is an inset component for the DIN rail. The Power Rail UPR-03 is a complete unit consisting of the electrical inset and an aluminium profile rail 35 mm x 15 mm x 2000 mm. To make electrical contact, the devices are simply engaged.

The Power Rail must not be fed via the device terminals of the individual devices!

distributed by:



WIKAL Alexander Wiegand GmbH & Co. KG

Alexander-Wiegand-Straße 30
 63911 Klingenberg/Germany
 Phone (+49) 93 72/132-0
 Fax (+49) 93 72/132-406
 E-Mail info@wika.de
www.wika.de

WIKAL order no.: 2341268

Release date 2005-12-05 15:01 Date of issue 2005-12-05 12:580_ENG.xml