

# Transmitter

## For gas density, temperature and pressure of SF<sub>6</sub> gas

### Model GDT-20, with Modbus® output

WIKA data sheet SP 60.09

#### Applications

- Permanent monitoring of the relevant gas condition parameters in closed tanks
- For internal and external SF<sub>6</sub>-insulated equipment

#### Special features

- High-accuracy sensor technology
- Modbus® output protocol via RS-485 interface
- Ingress protection IP65
- Very good long-term stability and EMC characteristics
- Compact dimensions



Transmitter model GDT-20

#### Description

The model GDT-20 transmitter is a multi-sensor system with digital output for the measurands of pressure and temperature. Based on these measured values, the condition-related data can be determined.

##### Permanent monitoring

In order to prevent system failures in switchgear and network outages, the permanent monitoring of the gas density is essential.

The GDT-20 transmitter calculates the current gas density from the pressure and temperature using a complex virial equation in the transmitter's powerful microprocessor. Changes in pressure resulting from thermal effects will be compensated by this and will not affect the output value.

##### Modbus® fieldbus

The RS-485 interface communicates using the Modbus® RTU protocol. The instrument's output parameters and their units can be configured and read according to requirements. The GDT-20 can be configured later by the customer for each defined SF<sub>6</sub> gas mixture with N<sub>2</sub> or CF<sub>4</sub>.

##### Signal stability

Due to its high long-term stability, the transmitter is maintenance-free and requires no recalibration. Due to the hermetically sealed weld seam and a measuring cell design without sealing elements, the permanent sealing of the measuring cell is ensured.

The EMC characteristics fulfil the IEC 61000-4-2 through to IEC 61000-4-6 standards and guarantee an interference-free data output.

## Specifications

Accuracy specifications		
<b>Accuracy</b>	The specifications only valid for pure SF <sub>6</sub> gas	
Density	±0.6 %, ±0.35 g/litre at -40 ... +80 °C [-40 ... +176 °F]	
Temperature	±1 K	
Pressure	-40 ... < 0 °C [-40 ... +32 °F]	±0.2 %, ±32 mbar
	0 ... 80 °C [32 ... 176 °F]	±0.06 %, ±10 mbar
Refresh rate		
Density	20 ms	
Temperature	20 ms	
Pressure	20 ms	
Long-term stability at reference conditions		
Temperature	≤ ±0.1 % of span/year	
Pressure	≤ ±0.05 % of span/year	


Measuring ranges	
<b>Density</b>	0 ... 60 g/litre (8.87 bar abs. at 20 °C [68 °F])
<b>Temperature</b>	-40 ... +80 °C [-40 ... +176 °F]
<b>Pressure</b>	0 ... 16 bar abs.
<b>Burst pressure</b>	52 bar abs.
<b>Overpressure limit</b>	Up to 30 bar abs.
<b>Pressure reference</b>	Absolute
<b>Unit</b>	Measured values with alternative units can be retrieved directly in the Modbus® registers
Density	g/litre, kg/m <sup>3</sup>
Temperature	°C, °F, K
Pressure	mbar, Pa, kPa, MPa, psi, N/cm <sup>2</sup> , bar (at 20 °C [68 °F])

Process connection	
<b>Thread</b>	G ½" B, male thread
<b>Material</b>	Stainless steel
<b>Transmission fluid</b>	Synthetic oil

Output signal	
<b>Voltage supply U<sub>B</sub></b>	DC 17 ... 30 V
<b>Power consumption</b>	Max. 0.5 W

Electrical connection	
<b>Connection type</b>	<ul style="list-style-type: none"> <li>■ Circular connector M12 x 1 (5-pin)</li> <li>■ Modbus® RTU via RS-485 interface</li> </ul>
<b>Modbus® functionality</b>	<ul style="list-style-type: none"> <li>■ Mixture ratio of SF<sub>6</sub> to N<sub>2</sub> or CF<sub>4</sub> (factory setting: 100 % SF<sub>6</sub> gas)</li> <li>■ Customer-specific sensor name</li> </ul>


## Pin assignment

Circular connector M12 x 1 (5-pin)			
	1	-	-
	2	U <sub>B+</sub>	Voltage supply
	3	U <sub>B-</sub>	Ground
	4	A	Signal RS-485
	5	B	Signal RS-485

Material	
Process connection	Stainless steel
Case	Stainless steel

Operating conditions		
<b>Permissible temperature ranges</b>		
Standard	Operation	-40 ... +80 °C [-40 ... +176 °F]
	Storage	-40 ... +80 °C [-40 ... +176 °F]
Option	Operation	-60 ... +80 °C [-76 ... +176 °F]
	Storage	-60 ... +80 °C [-76 ... +176 °F]
<b>Permissible air humidity</b>	≤ 90 % r. h. (non-condensing)	
<b>Ingress protection IP (IP code) per IEC 60529</b>	IP65, only when plugged in and using mating connectors with the corresponding ingress protection	
<b>Electrical safety</b>	Protected against reverse polarity, protected against overvoltage	
<b>EMC tests</b>	Immunity per IEC 61000-4-3	30 V/m (80 MHz ... 2.7 GHz)
	Burst per IEC 61000-4-4	4 kV
	Surge immunity per IEC 61000-4-5	2 kV conductor to ground, 1 kV conductor to conductor
	ESD per IEC 61000-4-2	8 kV/15 kV, contact/air
	High-frequency fields per IEC 61000-4-6	10 V


## Approvals

Logo	Description	Country
	EAC	Eurasian Economic Community
	EMC directive	
-	CRN Safety (e.g. electr. safety, overpressure, ...)	Canada

## Manufacturer's information and certificates

Logo	Description
-	China RoHS directive

## Dimensions in mm

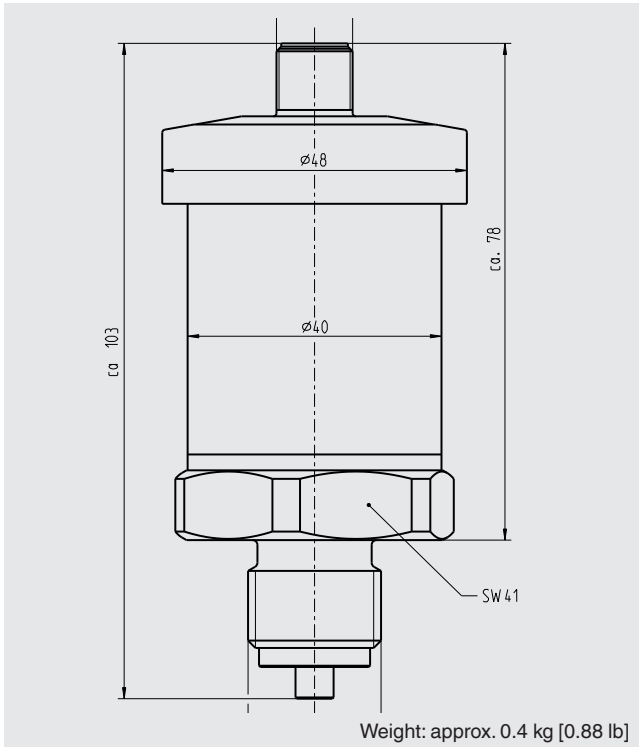

## Accessories

Designation	Order number
<b>Modbus® startup kit for configuration, consisting of:</b> <ul style="list-style-type: none"><li>■ Power supply unit for transmitter</li><li>■ Cable with M12 x 1 connector</li><li>■ Interface converter (RS-485 to USB)</li><li>■ USB cable type A to type B</li><li>■ Modbus® tool software on USB stick</li></ul>	14075896

## Ordering information

Model / Permissible ambient temperature / Accessories

© 08/2013 WIKA Alexander Wiegand SE & Co. KG, all rights reserved.  
The specifications given in this document represent the state of engineering at the time of publishing.  
We reserve the right to make modifications to the specifications and materials.

