

# Block-and-bleed valve IV202

2-valve manifold - Square form in-line

Design female x male connection


E 09.16.02

Ed.22.01

## IV202

Block-and-bleed valve 2-valve manifold  
Square form in-line  
Connection female x male

Material body stainless steel 316L  
Without mounting bracket hole  
Material packing PTFE  
Nominal pressure: 6000 psi / 420 bar  
With vent connection  
NACE Sour Gas Service  
Inspection certificate 3.1 EN 10204  
all wetted parts material

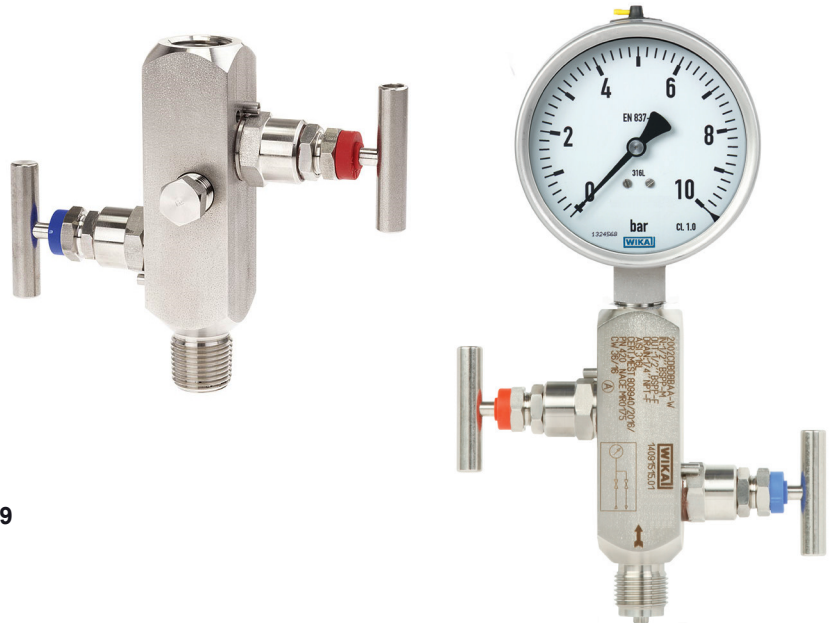

For more information: [WIKA Datasheet AC 09.19](#)

## Standard items

Item	Instrument side	Process side	Vent connection	Packing
46983368	G1/2 female	G1/2 male	G1/4 female with plug	PTFE
14275097	G1/2 female	G1/2 male	1/4 NPT female with plug	PTFE
14356959	G1/2 female	G1/2 male	1/4 NPT female with plug	Graphite
46957996	1/4 NPT female	1/4 NPT male	1/4 NPT female with plug	PTFE
47442334	1/2 NPT female	1/2 NPT male	1/4 NPT female with plug	PTFE
14308936	1/2 NPT female	3/4 NPT male	1/4 NPT female with plug	PTFE

## Items in special design

Item	Instrument side	Process side	Vent connection	Special design
45858712	G1/2 female	G1/2 male	1/4 NPT female with plug	For oxygen, oil and grease free
14308029	1/2 NPT female	1/2 NPT male	1/4 NPT female with plug	With bracket holes
81644828	1/2 NPT female	1/2 NPT male	1/4 NPT female with plug	Packing TA-Luft/ISO15848-1
57408043	1/2 NPT female	1/2 NPT male	1/4 NPT female with plug	PN 10000 psi / 689 bar
83136038	1/2 NPT female	1/2 NPT male	1/4 NPT female with plug	For oxygen, oil and grease free