

# Differential pressure gauge with Bourdon tube, parallel entry

## Measuring system stainless steel

### Models 732.18, 733.18

WIKA data sheet PM 07.03

#### Applications

- Measurement of differential pressures or of two different pressures applied in refrigeration plants or compressors
- Simultaneous measurement of the vapour pressure and the resulting vapour temperature
- For gaseous and liquid aggressive media that are not highly viscous or crystallising, also in aggressive ambience

#### Special features

- Differential pressure with moving dial
- Design optionally with duplex scale
- With liquid-filled case for damping in applications with high dynamic pressure loads or vibrations and for avoiding condensation water <sup>1)</sup>
- Combined pressure and temperature scales, as duplex, triplex or quadruple scales for all common refrigerants

#### Description

##### Design

Two independent measuring systems, parallel entries in line

##### Nominal size in mm

80, 100

##### Accuracy class

1.6

##### Scale ranges

0 ... 2.5 to 0 ... 60 bar	-1 ... 0 ... +25 bar
-1 ... 0 ... +12 bar	-1 ... 0 ... +30 bar
-1 ... 0 ... +15 bar	-1 ... 0 ... +35 bar
-1 ... 0 ... +16 bar	-1 ... 0 ... +40 bar

Other scale ranges on request

In order to ensure a good readability, the differential pressure should be no less than 1/6 of the full scale value.

<sup>1)</sup> Model 733.18



Differential pressure gauge model 733.18 with temperature scales and oil pressure display for refrigeration technology

When ordering state both pressures:

a) maximum total pressure applied, b) differential pressure

##### Pressure limitation

Steady: Full scale value  
Fluctuating: 0.9 x full scale value  
Short time: 1.3 x full scale value

##### Permissible temperature

Ambient: 0 ... +60 °C  
Medium: +100 °C maximum

##### Temperature effect

When the temperature of the measuring system deviates from the reference temperature (+20 °C):  
max.  $\pm 0.4\%$  / 10 K of full scale value

## Standard version

### Process connection

Stainless steel,  
lower mount (LM) or back mount (BM),  
2 x G 3/8 B (male), 19 mm flats,  
plus connection (HP) and minus connection (LP) identified at  
the gauge

### Pressure elements

Stainless steel, welded

### Movement

Copper alloy, wear parts argentan

### Dial

Aluminium, white, black lettering

### Pointer

1 standard pointer: Aluminium, black  
1 scale pointer: Aluminium, white  
scaled  $\pm 50\%$  of main scale range as  
 $\oplus$  and  $\ominus$  differential pressure indication

### Case

Stainless steel

### Window

Polycarbonate

### Bezel ring

Crimp ring, glossy finish stainless steel

### Filling liquid (for model 733.18)

Glycerine 99.7 %

### Ingress protection


IP 65 per EN 60529 / IEC 529

## Options

- Other process connections: 2 X G 1/4 B, 7/16-20UNF (1/4 Flare), M12 X 1.5 for 6 mm, (others on request)
- Sealings (model 910.17, see data sheet AC 09.08)
- Design with duplex scale ("duplex pressure gauge")
- Panel (only for NS 100) or surface mounting flange
- Panel frame 88 x 88 mm
- Mounting clamp for panel mounting
- Ingress protection IP 66 (only for case filling)


## Dimensions in mm

### Lower mount (LM) (NS 80 and 100)

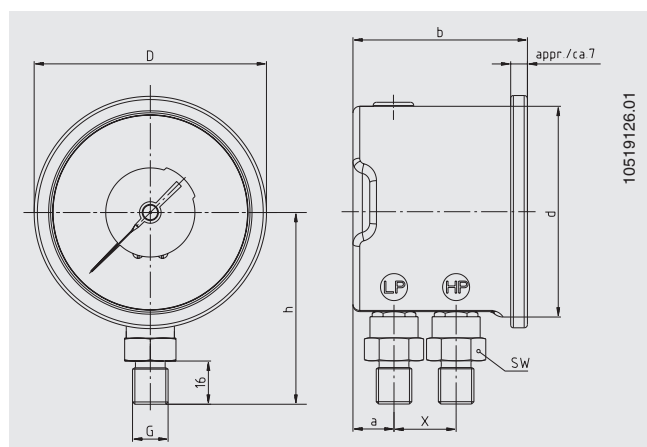


NS	Dimensions in mm								Weight in kg
	a	b	d	D	G	h $\pm 1$	X	SW	
80	15	64.5	78	86	G 3/8 B	71	23	19	0.49
100	16	74	99.5	107	G 3/8 B	83	26.5	19	0.65

### Back mount (BM) (NS 80)

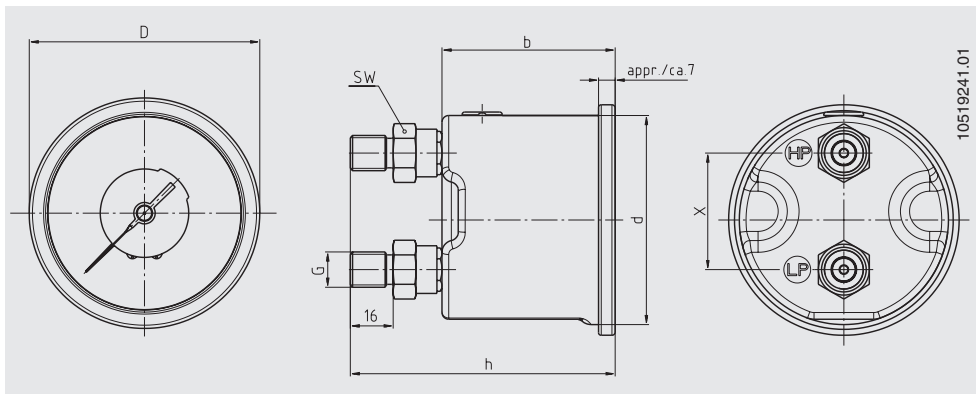

NS	Dimensions in mm							Weight in kg
	b	d	D	G	h ± 1	X	SW	
80	64.5	78	86	G 3/8 B	99	43.5	19	0.53

### Back mount (BM) (NS 100)

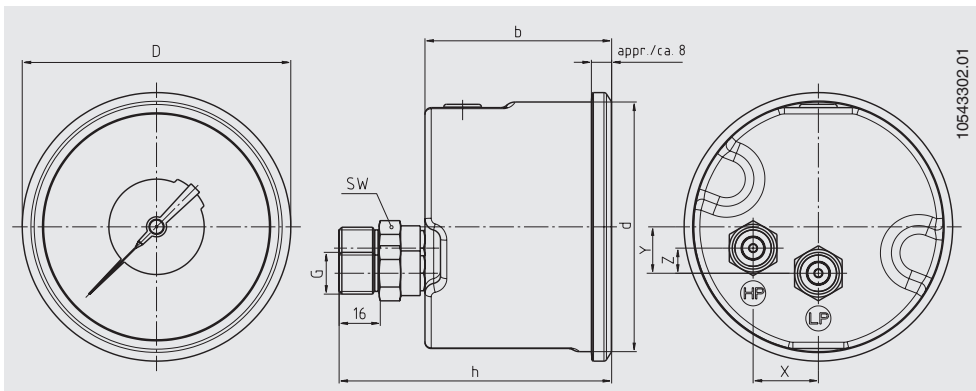

NS	Dimensions in mm								Weight in kg	
	b	d	D	G	h ± 1	X	Y	Z		SW
100	74	99.5	107	G 3/8 B	109	26	18.5	10	19	0.71

### Ordering information

Model / Nominal size / Scale range / Lettering / Differential pressure or duplex scale / Connection size / Connection location / max. total pressure applied / Differential pressure span / Options

© 2010 WIKA Alexander Wiegand SE & Co. KG, all rights reserved.  
The specifications given in this document represent the state of engineering at the time of publishing.  
We reserve the right to make modifications to the specifications and materials.

